


Product Description

LINK Power Distribution Unit (PDU) can meet the general requirements of power distribution and special demand. Solid, easy installation and modular composite structure are the basic characteristics. Security and stability are our guarantee for the products. The products can meet the installation requirements of 19-inch standard cabinet and non-standard cabinet. More control, outlet standards, accessibility functions can be customized. Applications support datacenter, telecommunications, PC systems, audio video, security, sound and other. Ideal for distribution of UPS, generator or other AC power to protected equipment.

Specifications

Nominal Voltage	:	220 - 250VAC
Frequency	:	50/60Hz
Maximum Amps	:	16A
Maximum Power	:	3,680W
Plug Type	:	TIS 166-2549 (16A)
Outlet Type	:	TIS 166-2549
Overload protection	:	16A
Lighting Switch w/Guard	:	16A
Surge Current	:	6.5KA
Power Cord Length (m)	:	3m
Power Cord Electrical Wiring	:	3x1.5mm ² , TIS 11 Part5-2553
Socket material	:	PC/ABS (UL94V-0)
Panel Material	:	Galvanized Steel
Outlet quantity	:	6, 12, 20 Outlets
PDU Bracket Kit	:	Included 1 Pairs
Warranty	:	1 Year
Compliant	:	RoHS

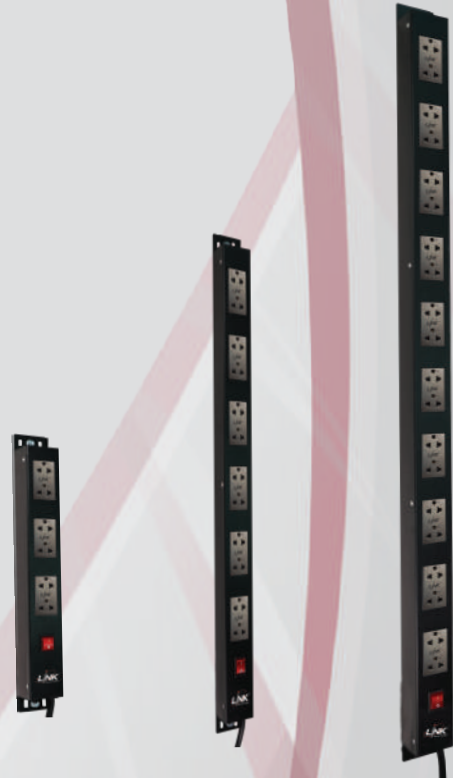

TIS Outlet
w/Eye Shutter



Plug Type
TIS 166-2549



Electronic
Circuit Breaker



Lighting Switch
w/Guard



Surge Suppressor

ORDERING INFORMATION

Order No.	Description	WxDxH (cm.)
CH-10306A	PDU 6 TIS Outlet w/Cable 3 M. + Lighting SW w/Guard , 16A	5.5 x 4.4 x 49.5
CH-10312A	PDU 12 TIS Outlet w/Cable 3 M. + Lighting SW w/Guard , 16A	5.5 x 4.4 x 79.5
CH-10320A	PDU 20 TIS Outlet w/Cable 3 M. + Lighting SW w/Guard , 16A	5.5 x 4.4 x 118.5

