


LINK SPEAKER CABLE

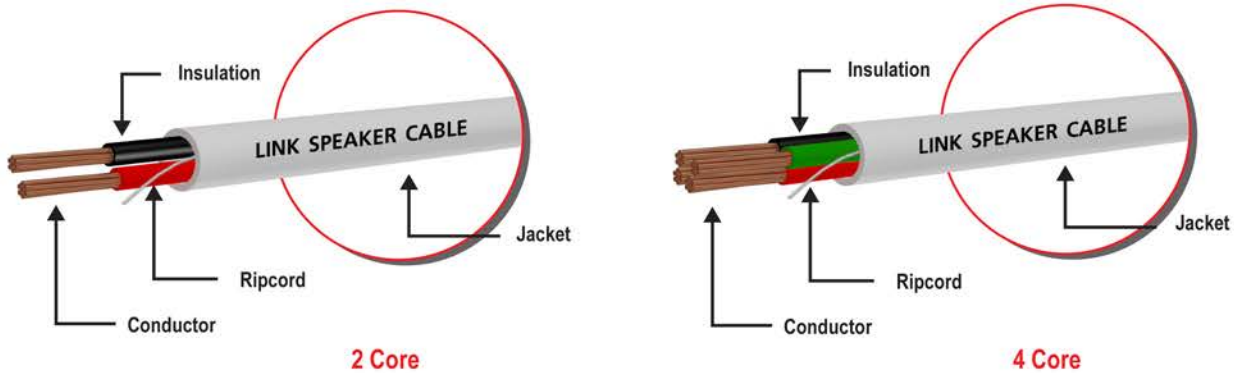

Features and Benefits

LINK Speaker cable is a high efficiency cable for audio/sound system and suitable for control, instrumentation & led lighting cable.

LINK Speaker cable in accordance with

UL13, UL444, UL CL2/CL3, C(UL) CM

Electrical Characteristics

Rating Temp. & Voltage	: 75°C 300V @20°C
Max. Conductor DC Resistance	Cond. Size(18 AWG) : ≤ 22.7 Ohms/Km @20°C Cond. Size(16 AWG) : ≤ 14.3 Ohms/Km @20°C Cond. Size(14 AWG) : ≤ 8.96 Ohms/Km @20°C
Min. Insulation Resistance	: ≥ 200 Mega Ohm/km @20°C
Dielectric Strength	: AC 1.5 KV for 2 s
Spark Test	: DC 2.5 KV

Cable Construction

• Conductor Material	:	Stranded Oxygen Free Copper
• Insulation Material	:	PVC
• Ripcord	:	Nylon
• Jacket Material (indoor)	:	FR-PVC, White color
• Jacket Material (indoor)	:	UV, Proof PE, Black color
• Min. Bending Radius	:	15 x O.D.
• Operating Temperature Range	:	0°C to 75°C

P/N	Flame Rating	Number of Cores	Conductor Diameter		Insulation Diameter (mm)	Jacket		Packaging
			AWG	mm		Thickness (mm)	Diameter (mm)	
CB-0518W	CL2/CL3	2	18	42x0.16	1.8±0.05	0.58	3.24x4.80	100m/Spool
CB-0516W	CL2/CL3	2	16	65x0.16	2.2±0.05	0.63	3.60x5.61	100m/Spool
CB-0514W	CL2/CL3	2	14	105x0.16	2.8±0.05	0.70	4.40x7.02	100m/Spool
CB-0618W	CL2/CL3	4	18	42x0.16	1.8±0.05	0.58	5.41	100m/Spool
CB-0616W	CL2/CL3	4	16	65x0.16	2.2±0.05	0.63	6.30	100m/Spool
CB-0614W	CL2/CL3	4	14	105x0.16	2.8±0.05	0.70	7.82	100m/Spool
CB-0718B	Outdoor	2	18	42x0.16	1.8±0.05	1.00	6.61	305m/Reel in Bx.
CB-0716B	Outdoor	2	16	65x0.16	2.2±0.05	1.00	7.50	305m/Reel in Bx.
CB-0714B	Outdoor	2	14	105x0.16	2.8±0.05	1.10	9.11	305m/Reel in Bx.