

Be Your Window To The World


The streamlined and edgeless shapes are elegant and generous; the composition of every line and the mastery of every circle demonstrates a high degree of perseverance and persistence. It is no longer just a functional product solely focused on meeting users' demands. It is the representation of a craftsman's spirit of excellence and the unrestrained freedom of fashion attitude. Likewise, the Modern Series have functions that fully meet the needs of users and the appearance that can be integrated into various environments. No matter where you are, you must retain your style and persistence in life.



Picture and logos

SELLING POINTS

- Red Dot Design Award 2021 Winner – Match the décor of your home or office with the most elegant & stylish design.
- TÜV certified display protects your eyesight and keeps your eyes healthy
- Anti-Flicker technology prevents your eyes from strain & fatigue
- Less Blue Light PRO technology simultaneously protects your eyes and keeps vivid color & detail.
- Ergonomically Designed Stand with tilt, swivel, height and pivot adjustments
- Exclusive ergonomic software: MSI Productivity Intelligence (P.I.) brings the most intuitive and efficient productivity
- 75 Hz refresh rate provides a better viewing experience
- Keep the flexibility for your different devices with multiple input sources, Type-C, HDMI & DP ports
- Standard VESA mountable design
- Always allow you to join an online conference call with built-in speakers

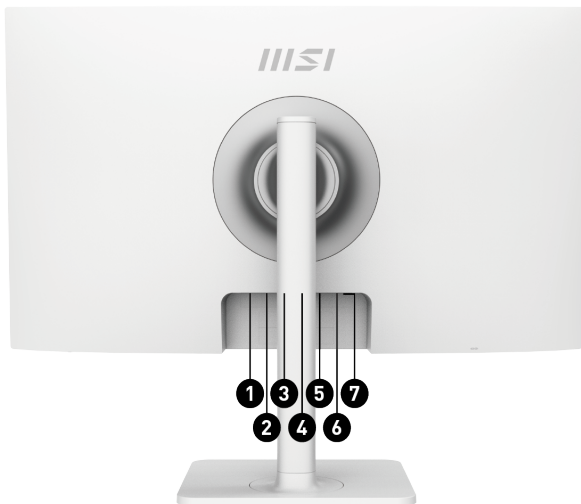

1. 1x DC Jack
2. 1x Type C (DP Alternate)
3. 1x DisplayPort (1.2a)
4. 1x HDMI (2.0b)
5. 1x Headphone-out
6. 1x USB 2.0 Type B
7. 2x USB 2.0 Type A

SPECIFICATION

Barcode Info	EAN	4711377022705
	UPC	824142304228
	UCC14	10824142304225
Model	Part No	9S6-3PB19H-065
	MKT Name	Modern MD272PW
	MKT Spec	Modern MD272PW
	Color	ID1/White-White
Display	Screen Size	27" (69 cm)
	Active Display Area (mm)	597.888(H)x336.312(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	HDR (High dynamic range)	N/A
	SDR Brightness (nits)	250
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	30~112 KHz(H) / 48~75 Hz(V)
	Refresh Rate	75Hz
	Response Time (Tr + Tf)	14ms
	View Angles	178°(H)/178°(V)
	Surface Treatment	Anti-glare
	NTSC (CIE1976 area percentage/overlap)	95%/80%
	NTSC (CIE1931 area percentage/overlap)	72%/70%
	sRGB (CIE1976 area percentage/overlap)	100%/85%
	sRGB (CIE1931 area percentage/overlap)	100%/85%
	Adobe RGB (CIE1976 area percentage/overlap)	90%/80%
	Adobe RGB (CIE1931 area percentage/overlap)	75%/70%
	DCI-P3 (CIE1976 area percentage/overlap)	80%/80%
	DCI-P3 (CIE1931 area percentage/overlap)	72%/70%
	Rec.709 (CIE1976 area percentage/overlap)	100%/85%
	Rec.709 (CIE1931 area percentage/overlap)	100%/80%
	Rec.2020 (CIE1976 area percentage/overlap)	55%/55%
	Rec.2020 (CIE1931 area percentage/overlap)	52%/52%
	Display Colors	16.7M
	Color bit	8 bits
	Note_DP	1920 x 1080 (Up to 75Hz)
	Note_HDMI™	1920 x 1080 (Up to 75Hz)
	Note_DVI	N/A
I/O Ports	HDMI™	1
	HDMI™ version	2.0b
	HDMI™ HDCP version	1.4
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	1.4
	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Lock type	Kensington Lock
	Speaker	2
	USB 2.0 Type B	1
I/O Ports (Front)	USB 480Mbps (USB 2.0)	2
Power	Annual Energy Consumption (KWh)	26W
	Power Supply Type	External Adaptor 19V 5.79A
	Power Input	100~240V, 50/60Hz
	Adapter's KC safety Number	HU10450-13034D
	Power Cord Type	C5
	QC Output Power	N/A
	PD Output	Type C
PD Output Power	65W	

In The Box	3.5mm Mic Cable	0
	Switch Case	0
	Portable Screen Protection Case	0
	Monitor Hood	0
	Speaker (Accessories)	0
	DisplayPort Cable	0
	HDMI™ Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	Mouse Bungee Unit	0
	VESA Screw	4
	Power Cord	1
	AC Adaptor	1
	Warranty Card	0
Quick Guide	1	
Pallet	pcs/Carton	N/A
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	75x75mm
	Frameless Design	Yes
Outer Carton Dimension (WxDxH)	Outer Carton Dimension (WxDxH) (mm)	907 x 181 x 492
	Outer Carton Dimension (WxDxH) (inch)	35.71 x 7.13 x 19.37
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	613.5 x 200.81 x 401.5
	Product Dimension with Stand (WxDxH) (inch)	24.15 x 7.91 x 15.81
Product Dimension without Stand (WxDxH)	Product Dimension without Stand (WxDxH) (mm)	613 x 72 x 362
	Product Dimension without Stand (WxDxH) (inch)	24.13 x 2.83 x 14.25
Stand Dimension (WxDxH)	Stand Dimension (WxDxH) (mm)	230.81 x 200.81 x 370.79
	Stand Dimension (WxDxH) (inch)	9.09 x 7.91 x 14.6
Dimension & Weight	Inside Carton Dimensions (WxDxH) (mm)	893 x 167 x 464
	Inside Carton Dimensions (WxDxH) (inch)	35.16 x 6.57 x 18.27
	Weight (Net kg)	5.85
	Weight (Gross kg)	8.1
Weight	Weight Without Stand (kg)	3.95
Warranty	Warranty	36M