


# ViewSonic® จอมอนิเตอร์แอลอีดี

## TD1630-3

### คีย์ คุณสมบัติ

- Advanced ergonomic stand for tilt or flat
- HDMI and VGA inputs
- Supports Windows® 7/8/10 and selected Linux
- 7H hardness screen
- Dual integrated speakers

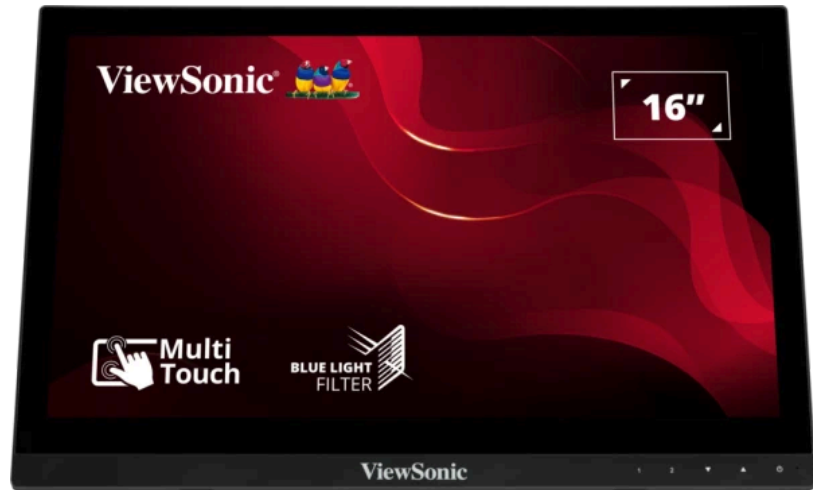

### สินค้า รายละเอียด

With advanced ergonomics, the display can tilt or lay flat to give users maximum comfort. TD1630-3 delivers touchscreen versatility, offering fantastic flexibility for retail or business settings. ViewSonic TD1630-3 is a 16" (15.6" viewable) display with 10-point multi-touch functionality, while VGA and HDMI inputs provide flexible connectivity. Adding to a list of versatility, the display is compatible with a wide range of operating systems, including Windows 10 and Linux versions.\* Along with the dual integrated speakers, this intuitive touchscreen delivers a highly accurate, ultra-responsive touch experience that is ideal for interactivity in retail or business settings. \*Supports Windows 7/8/10, Linux Kernel 4.X/3.X



1. Internal Speakers
2. USB
3. DC In
4. VESA Compatible(Wall Mount 75x75mm)
5. VGA
6. HDMI

7. Earphone

เยี่ยมชม เรา

[www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

|                                |  |
|--------------------------------|--|
| Display Size (in.):            | 16   |
| Viewable Area (in.):           | 15.6   |
| Panel Type:                    | TN Technology                                |
| Resolution:                    | 1366 x 768                                   |
| Resolution Type:               | WXGA (Wide XGA)                              |
| Static Contrast Ratio:         | 500:1 (typ)                                  |
| Dynamic Contrast Ratio:        | 10M:1  |
| Light Source:                  | LED  |
| Brightness:                    | 190 cd/m <sup>2</sup> (typ)                  |
| Colors:                        | 262K   |
| Color Space Support:           | 6 bit true                                   |
| Aspect Ratio:                  | 16:9   |
| Response Time (Typical Tr+Tf): | 12ms   |
| Viewing Angles:                | 90° horizontal, 60° vertical                 |
| Backlight Life (Hours):        | 15000 Hrs (Min)                              |
| Curvature:                     | Flat   |
| Refresh Rate (Hz):             | 60   |
| Low Blue Light:                | Software solution                            |
| Color Gamut:                   | NTSC: 45% size (Typ)<br>sRGB: 67% size (Typ) |
| Pixel Size:                    | 0.252 mm (H) x 0.252 mm (V)                  |
| Touch Screen:                  | Projected Capacitive, 10-point multi-touch   |
| Surface Treatment:             | Glossy, Hard Coating (7H)                    |
| Cover Glass Thickness:         | 0.83mm                                       |

**COMPATIBILITY**

|                        |   |
|------------------------|---|
| PC Resolution (max):   | 1366x768                                      |
| Mac® Resolution (max): | 1366x768                                      |
| PC Operating System:   | Windows 7/8/8.1/10/11 certified; macOS tested |
| Mac® Resolution (min): | 1366x768                                      |

**CONNECTOR**

|                 |                             |
|-----------------|-----------------------------|
| VGA:            | 1                           |
| USB 2.0 Type B: | 1                           |
| 3.5mm Audio In: | 1                           |
| HDMI 1.4:       | 1                           |
| Power in:       | DC Socket (Center Positive) |

**AUDIO**

|                    |           |
|--------------------|-----------|
| Internal Speakers: | 1Watts x2 |
|--------------------|-----------|

**POWER**

|                        |                        |
|------------------------|------------------------|
| Eco Mode (Conserve):   | 4.3W                   |
| Eco Mode (optimized):  | 4.9W                   |
| Consumption (typical): | 5.5W                   |
| Consumption (max):     | 6W                     |
| Voltage:               | AC 100-240V            |
| Stand-by:              | 0.5W                   |
| Power Supply:          | External Power Adaptor |

**ADDITIONAL HARDWARE****CONTROLS**

|                    |   |
|--------------------|---|
| Physical Controls: | 1, 2, Up, Down, Power   |
| On Screen Display: | Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall |

**OPERATING CONDITIONS**

|                            |                             |
|----------------------------|-----------------------------|
| Temperature:               | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90%                  |

**WALL MOUNT**

|                  |            |
|------------------|------------|
| VESA Compatible: | 75 x 75 mm |
|------------------|------------|

**INPUT SIGNAL**

|                       |            |
|-----------------------|------------|
| Frequency Horizontal: | 30 ~ 61KHz |
| Frequency Vertical:   | 56 ~ 75Hz  |

**VIDEO INPUT**

|               |                       |
|---------------|-----------------------|
| Digital Sync: | TMDS - HDMI (v1.4)    |
| Analog Sync:  | Separate - RGB Analog |

**ERGONOMICS**

|                      |           |
|----------------------|-----------|
| Tilt (Forward/Back): | 15° / 50° |
|----------------------|-----------|

**WEIGHT (IMPERIAL)**

|                          |     |
|--------------------------|-----|
| Net (lbs):               | 2.9 |
| Net Without Stand (lbs): | 2.9 |
| Gross (lbs):             | 5.5 |

**WEIGHT (METRIC)**

|                         |     |
|-------------------------|-----|
| Net (kg):               | 1.3 |
| Net Without Stand (kg): | 1.3 |
| Gross (kg):             | 2.5 |

**DIMENSIONS (IMPERIAL) (WXHxD)**

|                               |                   |
|-------------------------------|-------------------|
| Packaging (in.):              | 17.8 x 15.3 x 3.4 |
| Physical (in.):               | 14.9 x 9.7 x 1.5  |
| Physical Without Stand (in.): | 14.9 x 9.7 x 1.5  |

**DIMENSIONS (METRIC) (WXHxD)**

|                              |                |
|------------------------------|----------------|
| Packaging (mm):              | 453 x 389 x 86 |
| Physical (mm):               | 379 x 247 x 37 |
| Physical Without Stand (mm): | 379 x 247 x 37 |

**GENERAL**

|                   |  |
|-------------------|--|
| Regulations:      | CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, RCM, GEMS, BIS  |
| PACKAGE CONTENTS: | TD1630-3 x1, 3-pin Plug (IEC C13 / CEE22) x1, VGA Cable (Male-Male) x1, USB A/B Cable (v2.0; Male-Male) x1, Audio Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1 |
| Recycle/Disposal: | Please dispose of in accordance with local, state or federal laws.   |
| Warranty:         | *Warranty offered may differ from market to market   |

|                       |   |
|-----------------------|---|
| Kensington Lock Slot: | 1 |
|-----------------------|---|

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.