


คีย์ คุณสมบัติ

- HDMI and VGA inputs
- VESA mountable
- 50M:1 dynamic contrast ratio
- ViewMode technology
- 16:9 aspect ratio



สินค้า **รายละเอียด**

The ViewSonic® VA1903H-2 is a 19" (18.5" viewable) widescreen monitor that delivers value and performance for both home offices and small businesses. Equipped with HDMI inputs, a fast 5ms response time, and a 50M:1 Dynamic Contrast Ratio, the VA1903H-2 is great for a variety of applications ranging from viewing office documents to surfing the web. Featuring a hairline surface finish, this monitor looks great on any desktop. ViewSonic's exclusive ViewMode™ feature provides intuitive presets for optimised screen performance in different applications. In addition, Flicker-Free technology and a Blue Light Filter help to eliminate eyestrain from extended viewing periods for improved productivity. An energy-saving Eco-mode reduces cost of ownership, making the VA1903H-2 a great choice for both government and education.

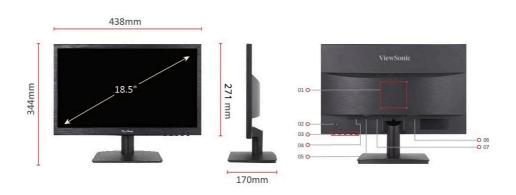

- 1. VESA Compatible(Wall mount 75mm x 7
- 75mm)
- 2. Kensington® Lock Slot
- 3. Menu Control Panel
- 4. HDMI
- 5. VGA
- 6. Earphone

เยี่ยมชม เรา

www.viewsonic.com

DISPLAY		CONTROLS	
Display Size (in.):	19	Physical Controls:	Auto, Left, Right, Menu, Power
Viewable Area (in.):	18.5	,	•
Panel Type:	TN Technology	On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall
Resolution:	1366 x 768		
Resolution Type:	WXGA (Wide XGA)		
Static Contrast Ratio:	600:1 (typ)		
Dynamic Contrast Ratio:	1.4	OPERATING CONDITIONS	
High Dynamic Range:	50M:1	Temperature:	32°F to 104°F (0°C to 40°C)
Light Source:	LED	Humidity (non-condensing):	20% to 90%
Brightness:	200 cd/m² (typ)	WALL MOUNT	
Colors:	16.7M	VESA Compatible:	75 x 75 mm
Color Space Support:	8 bit (6 bit + FRC)	INPUT SIGNAL	
Aspect Ratio:	16:9	Frequency Horizontal:	RGB Analog: 24 ~ 82KHz, HDMI (v1.4): 15 ~ 82KHz
Response Time (Typical Tr+Tf):	5ms		
Viewing Angles:	90° horizontal, 65° vertical	Frequency Vertical:	RGB Analog: 50 ~ 75Hz, HDMI (v1.4): 50 ~ 75Hz
Backlight Life (Hours):	30000 Hrs (Min)	VIDEO INPUT	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7
Curvature:	Flat	Digital Sync:	TMDS - HDMI (v1.4)
Refresh Rate (Hz):	60	Analog Sync:	Separate - RGB Analog
Low Blue Light:	Software solution	ERGONOMICS	Copulate 11027thalog
Flicker-Free:	Yes	Tilt (Forward/Back):	-3° / 18°
Color Gamut:	NTSC: 72% size (Typ)	WEIGHT (IMPERIAL)	
Pixel Size:	sRGB: 102% size (Typ) 0.3 mm (H) x 0.3 mm (V)	Net (lbs):	4.6
		Net Without Stand (lbs):	4
Surface Treatment:	Anti-Glare, Hard	Gross (lbs):	6.6
	Coating (3H)	WEIGHT (METRIC)	
PC Resolution (max):	1366x768	Net (kg):	2.1
Mac® Resolution (max):	1366x768	Net Without Stand (kg):	1.8
Mace Resolution (max).		Gross (kg):	3
PC Operating System:	Windows 10/11 certified; macOS tested	DIMENSIONS (IMPERIAL) (WX	(HXD)
Mac® Resolution (min):	1366x768	Packaging (in.):	19.8 x 13.7 x 4.1
CONNECTOR		Physical (in.):	17.2 x 13.5 x 6.7
VGA:	1	Physical Without Stand (in.):	17.2 x 10.7 x 1.9
3.5mm Audio Out:	1	DIMENSIONS (METRIC) (WXH	XD)
HDMI 1.4:	1	Packaging (mm):	502 x 349 x 105
Power in:	3-pin Socket (IEC C14	Physical (mm):	438 x 344 x 170
POWER	/ CEE22)	Physical Without Stand (mm):	438 x 271 x 48
Eco Mode (Conserve):	9.5W	GENERAL	
Eco Mode (optimized):	12.5W	Regulations:	cTUVus, FCC-B, ICES003, CEC, IQC- ST, MX-CoC, Mexico Energy, CB, RoHS, WEEE, BSMI, BIS
Consumption (typical):	15.3W 17W		
Consumption (max):		PACKAGE CONTENTS:	VA1903H-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male- Male) x1, Quick Start
Voltage:	AC 100-240V 0.5W		
Stand-by:			
Power Supply: ADDITIONAL HARDWARE	Internal Power Supply		Guide x1
Kensington Lock Slot:	1	Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
		Warranty:	*Warranty offered may differ from market to market