

## THC-B120-C 2 MP Fixed Mini Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP66)




## ▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.02 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	Fixed focal lens, 2.8 mm and 3.6 mm
Focal Length & FOV	2.8 mm, horizontal FOV: 96.5°, vertical FOV: 48.9°, diagonal FOV: 120.5° 3.6 mm, horizontal FOV: 76.9°, vertical FOV: 40.6°, diagonal FOV: 92.0°
Lens Mount	M12
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 20 m
Image	
Image Settings	Brightness, Mirror, Smart IR, Sharpness, AGC
Frame Rate	PAL: 1080p @ 25 fps NTSC: 1080p @ 30 fps
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Noise Reduction	2D DNR
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Material	Front cover: Metal, Main body: Plastic
Dimension	165 mm × 62 mm × 58 mm (6.50" × 2.44" × 2.28")
Weight	Approx. 167 g (0.37 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity 90% or less (non-condensing)
Language	English
Power	12 VDC ± 15%, Max. 2.9 W
Approval	
Protection	IP66

## ▪ Available Model

THC-B120-C

## ▪ Dimension

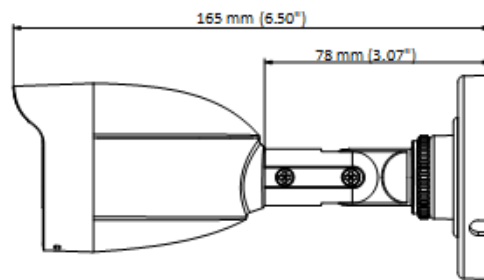

## ▪ Accessory

## ▪ Optional

HIA-J101

Junction Box

