

ViewSonic® LCD DISPLAY

VA2732-H-W


Key Features

- SuperClear® IPS panel
- Full HD 1080p resolution
- 1ms (MPRT) response time for precision
- 100Hz Variable refresh rate delivers fluid visuals
- Eye ProTech+ for always-on eye protection



Product Description

The ViewSonic VA2732-H-W is a 27" Full HD monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering are delivered through variable refresh rate, Eye ProTech+ eye-care technology, and various ViewMode presets. Experience truly seamless on just one screen with a VESA-compatible mount at a low power consumption.

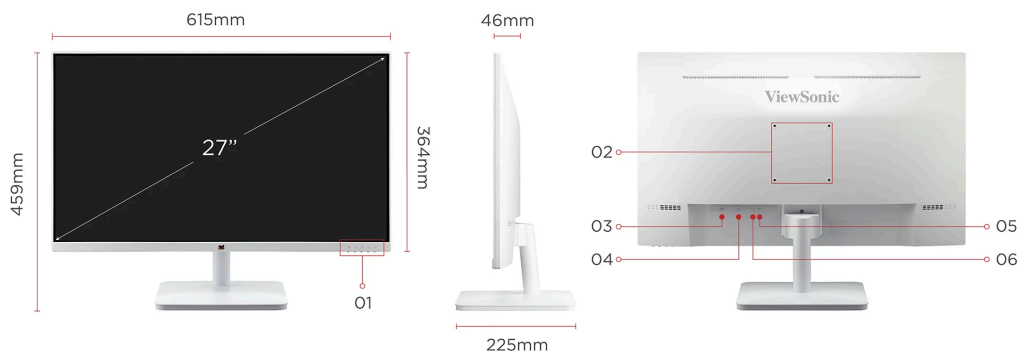

1. Menu Control Panel
2. VESA Compatible(Wall Mount 100 x 100mm)
3. HDMI
4. VGA
5. Power In
6. Audio Out

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	100
Variable Refresh Rate Technology:	Yes
Low Blue Light:	Hardware and software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 77% size (Typ) sRGB: 109% size / 99% coverage (Typ)
Pixel Size:	0.311 mm (H) x 0.311 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

POWER

Eco Mode (Conserve):	20W
Eco Mode (optimized):	24W
Consumption (typical):	28W
Consumption (max):	30W
Voltage:	AC 100-240V
Stand-by:	0.3W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 24 ~ 115KHz
Frequency Vertical:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 100Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	9
Net Without Stand (lbs):	7.9
Gross (lbs):	13.2

WEIGHT (METRIC)

Net (kg):	4.1
Net Without Stand (kg):	3.6
Gross (kg):	6

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	27.4 x 18.1 x 5.7
Physical (in.):	24.21 x 18.06 x 8.86
Physical Without Stand (in.):	24.21 x 14.32 x 1.81

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	695 x 460 x 145
Physical (mm):	615 x 458.8 x 225
Physical Without Stand (mm):	615 x 363.8 x 46

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, KC, K-MEPS, BIS
PACKAGE CONTENTS:	VA2732-H-W x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market