



WAX610D

802.11ax (WiFi 6) Dual-Radio Unified Pro Access Point

The WAX610D is truly the next generation of wireless (WiFi 6) AP, especially for businesses looking to strike the right balance between performance and budget. It embodies the full range of WiFi 6 technologies including UL/DL, OFDMA, MU-MIMO, and 1024 QAM, which enables the ultra-fast speed of 2975 Mbps. The WAX610D 4x4 (5G) + 2x2 (2.4G) dual-optimized antenna design boasts the most effective solution to guarantee that it provides smooth and consistently fast service to each client at all times whether it is wall-mounted or ceiling-mounted. Also, it uses the second generation transmit beamforming technology incorporating Low End Sensitivity Improvements and Time Domain Channel Smoothing allowing data rates to increase for not only MU-MIMO clients, but for all existing ones as well.

The WAX610D is not only efficient at delivering impressive high speeds with smooth and consistent delivery to wireless clients, but also it's efficient on power. The WAX610D can deliver its impressive performance while keeping the consumption of PoE within the PoE+ standard, so that you can enjoy the latest WiFi 6 technology, experience first-hand the uncompromising multi-gigabit speed when coupling with the capacity of Zyxel XS1930 Series switches without the need of re-cabling.

The WAX610D with NebulaFlex Pro offers the full flexibility for users to switch among standalone, controller-managed and cloud-managed modes. In addition, it comes with a 1-year bundled Nebula Professional Pack license¹ that eliminates immediate licensing cost when migrating to full-featured cloud management.



Dual-radio (dual 4x4+2x2 MIMO) 802.11ax AP provides maximum data rate of 2975 Mbps



Coupled the capacity with Zyxel XS1930 Series switches, the 2.5GbE uplink delivers uncompromising multi-gigabit speed without the need of re-cabling



Dual-optimized antenna provides wall-/ceiling-mounting modes to fit in your deployment



NebulaFlex Pro allows users to switch among standalone, on-premises controller managed or intuitive Nebula cloud managed modes as needed



Advanced Cellular Coexistence minimizes interferences from 4G/5G cellular networks

Benefits

Bringing next generation WiFi within reach

Zyxel's new WAX610D is a true WiFi 6 access point that delivers faster performance and massive increased-capacity, which along with unique Zyxel dual optimized antenna technology, make the user experience even better. Apart from running at 25% faster speed, the WAX610D can also accommodate more client devices without any fall-off in speed, allowing an easy scale-up capacity to support hundreds of connections without increased latency.

NebulaFlex Pro – simply manage it your way!

The NebulaFlex Pro provides extended flexibility, allowing users to easily switch among standalone, on-promises controller or our intuitive NCC (Nebula Control Center) modes any time according to your needs without additional cost while protecting wireless technology investments. The privilege of one-year professional pack you can get once upon registration on Nebula includes wireless health, site-wide topology, 365-day statistics on the devices and clients monitoring along with more upcoming advanced features on NCC and its App.

Unparalleled high-density performance

Essentially, there are two technologies that make a real difference in WiFi 6 – orthogonal frequency-division multiple access (OFDMA), and spatial re-use, which is also referred to as Basic Service Set (BSS) coloring. These make WiFi 6 a much more efficient technology than 802.11ac. The BSS coloring allows multiple access points to be used in the same vicinity without fear of co-channel interference.

Superior performance with innovative “Dual-optimized” antenna


People without RF expertise may not realize that installing an AP optimized for ceiling-mount as wall-mount may cause the ceiling-mount radiation pattern to interfere with other devices up- or downstairs as well as to deliver signals with shorter-than-expected range for its clients. Designed with the innovative “Dual-optimized” antenna, the WAX610D adapts to both wall- and ceiling-mount installations. Thus, users can switch between the two optimized antenna modes easily to fit either situation. To boost WiFi speeds for your network, the WAX610D is definitely an excellent choice.

4G/5G cellular network coexistence


With the growing pervasiveness of mobile devices in the wireless network, users start to experience degraded performance, such as ping drops and high latency, however whenever user shutdown the mobile equipment, wireless service resumes working smooth. Thus, to enable 4G/5G cellular network coexistence and minimize interference from 4G/5G antennas or signal boosters, the WAX610D has built-in 4G/5G interference filters. As a result, the visible or invisible 4G/5G indoor antennas in the environment is no longer an issue when installing APs.

*1: The licensing terms may vary depending on part numbers or regions
Please contact your local sales representative.


Powerful Hardware Design

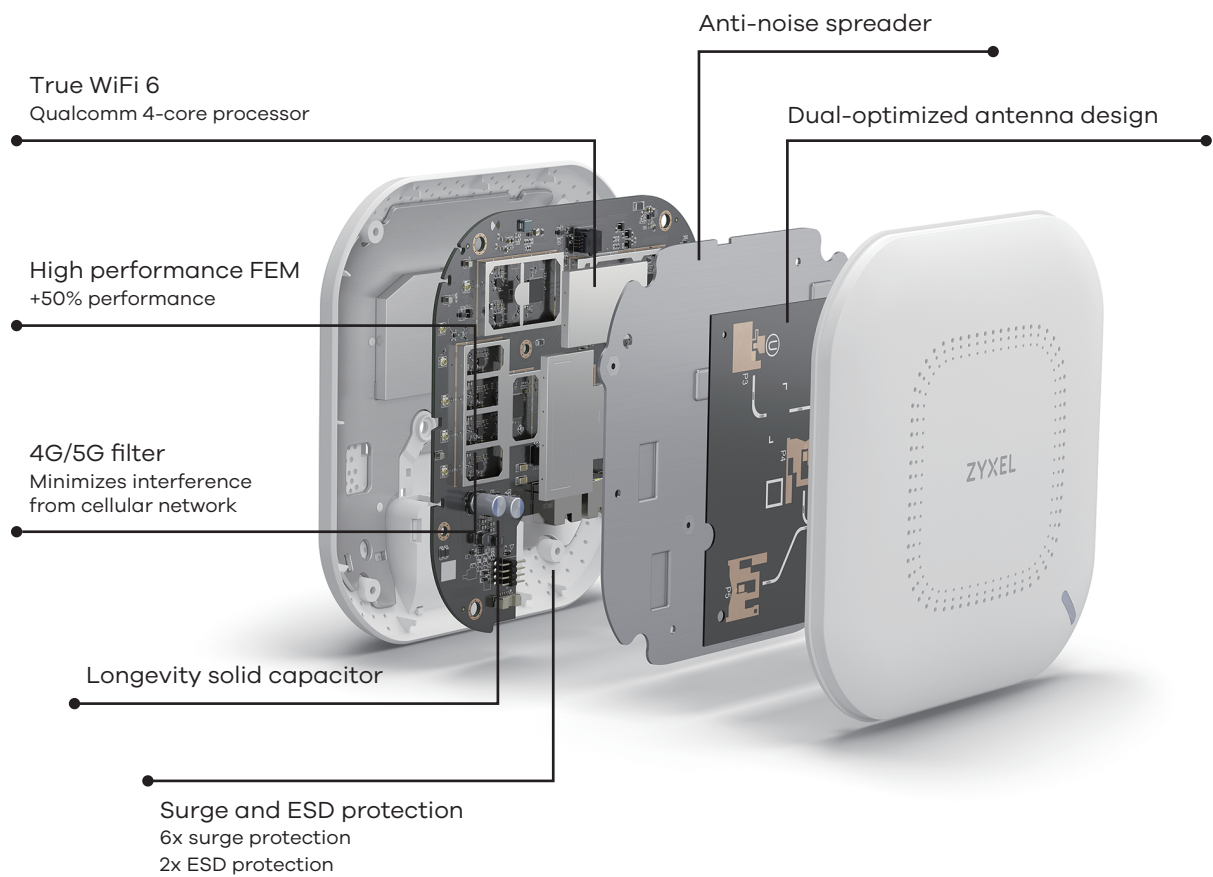

Switch Among Triple Modes

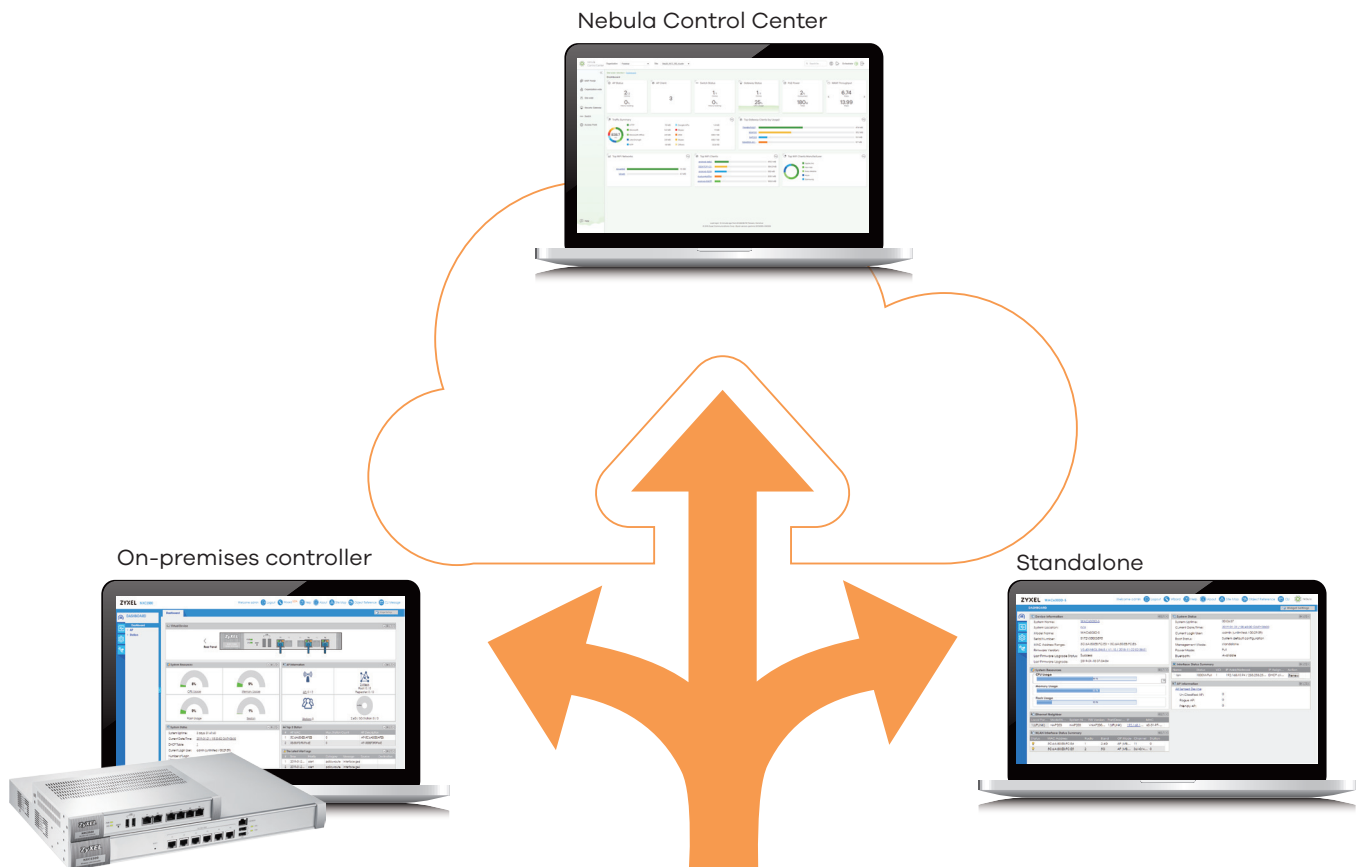

Suggested PoE Injector

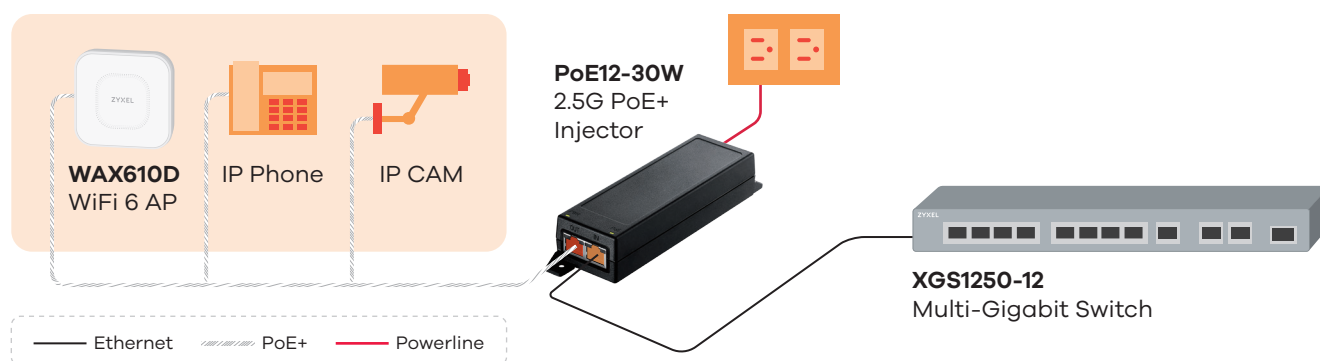

Specifications

Model	WAX610D
--------------	----------------

Product name 802.11ax (WiFi 6) Dual-Radio Unified Pro Access Point



Wireless

Standard	IEEE 802.11 ax/ac/n/g/b/a	
MIMO	MU-MIMO	
Wireless speed	2.4 GHz	575 Mbps
	5 GHz	2400 Mbps
Frequency band	2.4 GHz	<ul style="list-style-type: none"> USA (FCC): 2.412 to 2.462 GHz Europe (ETSI): 2.412 to 2.472 GHz
	5 GHz	<ul style="list-style-type: none"> USA (FCC): 5.15 to 5.35 GHz; 5.470 to 5.850 GHz European (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz
Bandwidth	20-, 40-, 80- and 160-MHz	
Conducted typical transmit output power*1 (limited by local regulatory requirements)	US (2.4 GHz/5 GHz)	23/28 dBm
	EU (2.4 GHz/5 GHz)	19/25 dBm

RF Design

Antenna type	4x4 + 2x2 dual-optimized antenna	
Antenna gain	2.4 GHz	Peak gain 5 dBi
	5 GHz	Peak gain 6 dBi
Minimum receive sensitivity	Min. Rx sensitivity up to -101 dBm	

WLAN Feature

Band steering	Yes
WDS/Mesh*2	Yes (V6.10)
Fast roaming	Pre-authentication, PMK caching and 802.11r/k/v
DCS	Yes
Load balancing	Yes

*1: Conducted typical transmit output power excludes antenna gain. For total (EIRP) transmit power, add antenna gain.

*2: WDS, ZyMesh, Smart Mesh and Industry's Open Mesh, Easy Mesh are different mesh systems that do not work with one another.

Model		WAX610D
Security		
Encryption	WEP/WPA/WPA2/WPA3	
Authentication	IEEE 802.1X/RADIUS authentication	
Access management	L2-isolation/MAC filtering/Rogue AP detection	
Networking		
IPv6	Yes	
VLANs	Yes	
WMM	Yes	
U-APSD	Yes	
DiffServ marking	Yes	
Management		
Operating mode	Nebula Cloud managed/controller-managed/standalone	
ZON Utility	<ul style="list-style-type: none"> • Discovery of Zyxel switches, APs and gateways • Centralized and batch configurations <ul style="list-style-type: none"> ▪ IP configuration ▪ IP renew ▪ Device reboot ▪ Device locating ▪ Web GUI access ▪ Firmware upgrade ▪ Password configuration 	
Zyxel Wireless Optimizer	<ul style="list-style-type: none"> • WiFi AP planning • WiFi coverage detection • Wireless health management 	
Web UI/CLI	Yes	
SNMP	Yes	
Physical Specifications		
Item	Dimensions (WxDxH)(mm/in.)	180 x 180 x 39/7.09 x 7.09 x 1.54
	Weight (g/lb.)	545/1.20
Packing	Dimensions (WxDxH)(mm/in.)	229 x 216 x 64/9.02 x 8.50 x 2.52
	Weight (g/lb.)	780/1.72
Included accessories	<ul style="list-style-type: none"> • Mount plate • Mounting screws 	
MTBF (hr)	329,004	
Physical Interfaces		
Ethernet port	1 x 10/100/1000/2500M LAN 1 x 10/100/1000M LAN	
Power	<ul style="list-style-type: none"> • PoE (802.3) at: power draw 19.5 W • DC input: 12 VDC 2 A 	
Environmental Specifications		
Operating	Temperature	0°C to 50°C/32°F to 122°F
	Humidity	10% to 95% (non-condensing)
Storage	Temperature	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90% (non-condensing)
Certifications		
Radio	FCC Part 15C, FCC Part 15E, ETSI EN 300 328, EN 301 893, LP0002	
EMC	FCC Part 15B, EN 301 489-1, EN 301 489-17, EN55022, EN55024, EN61000-3-2/-3, EN60601-1-2, BSMI CNS13438	
Safety	Safety EN 60950-1, IEC 60950-1, BSMI CNS14336-1	

Accessory

Model

PoE12-30W



RJ-45 (Data) input	1
RJ-45 (Data + Power) output	1
Data rate	100 Mbps and 1/2.5 Gbps
PoE standard	PoE, PoE+
Total PoE budget	30 watts
Suggested WiFi 6 AP	WAX610D

For more product information, visit us on the web at www.zyxel.com

Copyright © 2024 Zyxel and/or its affiliates. All rights reserved.
All specifications are subject to change without notice.



Datasheet [WAX610D](#)

08/04/24