



จอมอนิเตอร์แอลอีดี

VA2708-4K-MHD


คีย์ คุณสมบัติ

- 4K UHD 3840 x 2160 resolution
- SuperClear® IPS panel
- HDR10 Delivers Stellar Contrast and Color Accuracy
- Dual HDMI and DisplayPort inputs for flexible connectivity
- Eye ProTech for comfortable viewing



สินค้า รายละเอียด

The ViewSonic VA2708-4K-MHD is a 27" 4K IPS monitor featuring dual HDMI and DisplayPort inputs for business and home use. The optimal screen performance and comfortable viewing are delivered through eye-care technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless multitasking on just one screen with a VESA-compatible mount at low power consumption.

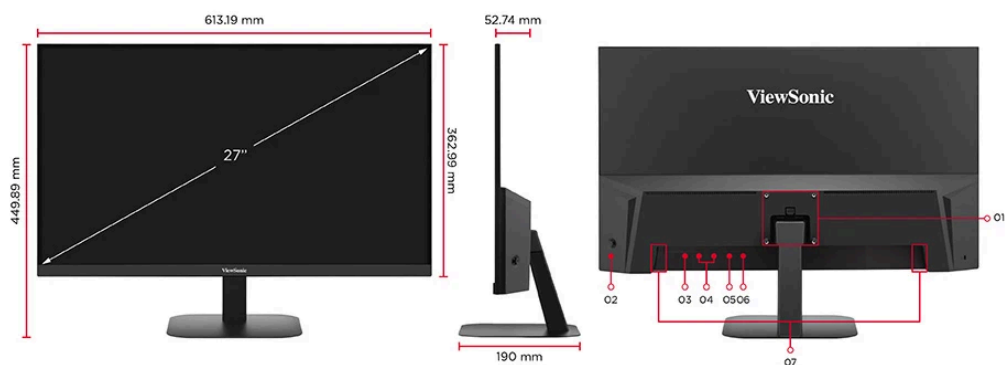

1. VESA Compatible(Wall Mount 75 x 75mm)
2. Joy Key
3. Power In
4. HDMI*2
5. DisplayPort
6. Audio Out
7. Speakers

เยี่ยมชม เรา

www.viewsonic.com

DISPLAY

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	3840 x 2160
Resolution Type:	UHD (Ultra HD)
Static Contrast Ratio:	1,200:1 (typ)
Dynamic Contrast Ratio:	50M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	1.07B
Color Space Support:	10 bit (8 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Low Blue Light:	Software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.155 mm (H) x 0.155 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	3840x2160
Mac® Resolution (max):	3840x2160
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	3840x2160

CONNECTOR

3.5mm Audio Out:	1
HDMI 2.0 (with HDCP 2.2):	2
DisplayPort:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	21W
Eco Mode (optimized):	26W
Consumption (typical):	28W
Consumption (max):	33W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Up, Right, Down, Left, Power
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	75 x 75 mm
------------------	------------

INPUT SIGNAL

Frequency Horizontal:	HDMI (v2.0): 15 ~ 140KHz, DisplayPort (v1.4): 24 ~ 140KHz
Frequency Vertical:	HDMI (v2.0): 24 ~ 60Hz, DisplayPort (v1.4): 48 ~ 60Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4)
---------------	--

ERGONOMICS

Tilt (Forward/Back):	-5° / 15°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	9
Net Without Stand (lbs):	7.3
Gross (lbs):	12.1

WEIGHT (METRIC)

Net (kg):	4.1
Net Without Stand (kg):	3.3
Gross (kg):	5.5

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	26.6 x 18 x 4.2
Physical (in.):	24.14 x 17.71 x 7.48
Physical Without Stand (in.):	24.14 x 14.29 x 2.08

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	676 x 458 x 107
Physical (mm):	613.19 x 449.89 x 190
Physical Without Stand (mm):	613.19 x 362.99 x 52.74

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, VCCI, PSE, BIS
--------------	--

PACKAGE CONTENTS:	VA2708-4K-MHD x1, HDMI Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country) for VSE
-------------------	--

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--