


HWT-E3050-00-I -P

5MP IR Dome Camera

Indoor Application

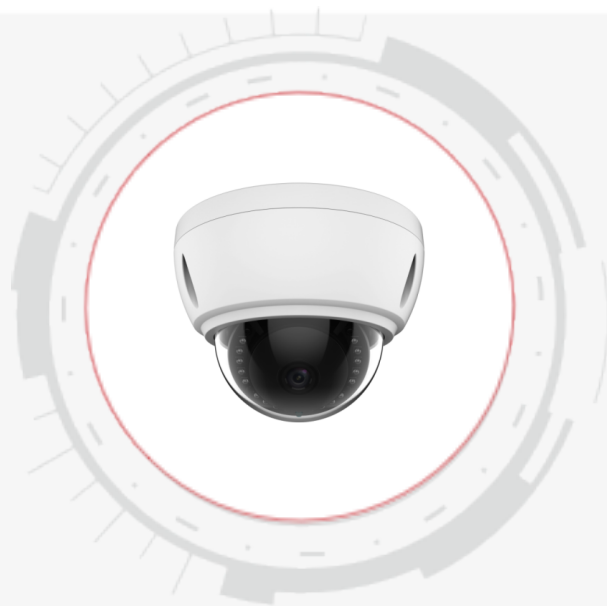

Features

- ▶ 1/3" CMOS sensor
- ▶ DC12V/2A, PoE (IEEE 802.3af)
- ▶ Ingress Protection: IP66
- ▶ 18 infrared lights, the maximum fill light distance is 12m

Technical Specifications

Model HWT-E3050-00-I-P

Major Specifications

Camera	Image sensor	1/ 3" CMOS
	Maximum Resolution	2560*1792
	Effective Pixels	5.0MP
	Supported resolution	Main Stream 50Hz : 20fps (2560x1792) 25fps(2560x1440,2048x1440,1920*1080,1280*960,1280*720,960*540,768x432,720x576,720x480,704x576,640x480,512*288,352*288) 60Hz : 20fps (2560x1792) 25fps(2560x1440,2048x1440,1920*1080,1280*960,1280*720,960*540,768x432,720x576,720x480,704x576,640x480,512*288,352*288) Sub-Stream 50Hz : 25fps (768x432,720x576,720x480,704x576,640x480,512*288,352*288) 60Hz : 25fps (768x432,720x576,720x480,704x576,640x480,512*288,352*288)
	Video Compression Standard	Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG
	Frame Rate	5.0MP@20fps
	ROM/RAM	8MB/64MB
	code stream	Main stream : 270~8192Kbps, Sub-stream : 58~2320Kbps
	Video Steam	Support VBR,CBR
	Focal length	2.8mm or 3.6mm
	Max Aperture	F2.0
	Lens aperture type	Fixed iris
	Angle of view	2.8mm, Horizontal FOV 88°, Vertical FOV 65°, Diagonal FOV 107° 3.6mm, Horizontal FOV 73°, Vertical FOV 50°, Diagonal FOV 89°
	IR range	12m
	Infrared light	14μ x 18
	Minimum illumination	Color:0.01Lux (F1.2, AGC ON, 1/30s shutter speed)B/W:0.001Lux (F1.2, AGC ON, 1/30s shutter speed) 0 Lux infrared illuminator enabled)
	Shutter Time	1/3 s to 1/100, 000 s
Function	Basic Event	Motion Detection, Email Alert
	Image Rotation	support (mirror/flip)
	Wide Dynamic	DWDR
	Image Enhancement	BLC,3D DNR
	Ethernet	10M/100M Ethernet, RJ45 port
Network	External Audio Input	Support
	ONVIF	ONVIF 2.4(Profile S)
	User/Host	Up to 20 users with 3 levels of permissions: administrator, regular user and guest
	WEB Interface	Support Chinese/English
	Web Browser	Plug-in required live view: IE 10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+

Technical Specifications

General Specifications	
Power type	12 V DC and PoE (IEEE 802.3af)
Power consumption	Day \leq 3W Night \leq 7W
Operating temperature	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)
Operating humidity	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)
IP rating	IP66
Weight	500g
Dimensions	ϕ 120x86.5 mm

Dimensions

