


# Collaboration at your fingertips in 4K

Dell 86 4K Interactive Touch Monitor | P8624QT

The world's # 1 monitor company\*

\* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q1 2023. From 2014 to 2022.

# Collaboration at your fingertips in 4K

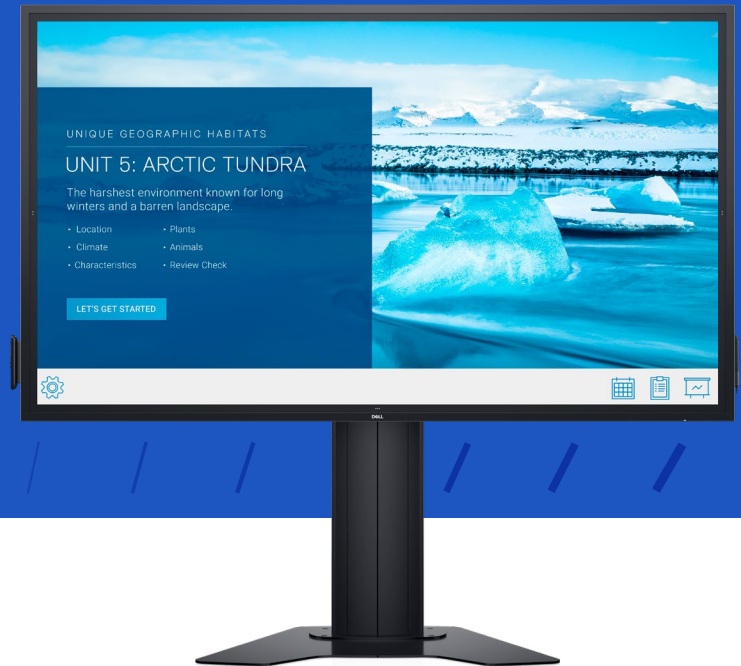

**Real-time collaboration on this 85.6" 4K interactive touch monitor.**

## Bringing teams together

Actively engage with your teammates whether they are in the room or at a remote location with this brilliant 4K 85.6" monitor with 20-point touch, built-in dual 20W speakers and dual-tip stylus.

## Convenient connectivity, setup and management

Comprehensive connectivity options including USB-C®, easy installation and network manageability.

## Exclusive to Dell. Inclusive for all.

Exclusive Dell Screen Drop feature, designed to improve reachability for users working from different heights.

## A touch above the rest

### Striking presentations

No matter where you stand or sit, see consistent colors across the screen thanks to the wide viewing angle enabled by In-Plane Switching (IPS) technology.

### Clearly captivating

Experience exceptionally sharp 4K images and text with monitor scaling technology. ComfortView and anti-glare, anti-smudge coatings deliver greater legibility and a better extended viewing experience.

### All-in-one convenience


Seamlessly integrate an optional Dell OptiPlex Micro and allow IT to select the best option for varying business needs.

### Manage your meeting spaces

With RS232, RJ45 and HDMI CEC ports, you can use remote management tools to maintain and control your Large Format monitor with a network control system.

### Connect to productivity

Make your monitor a productivity hub with extensive connectivity options including HDMI, DP and USB-C (with up to 90W of power delivery) that delivers power, audio and video — all in one clutter-free setup.

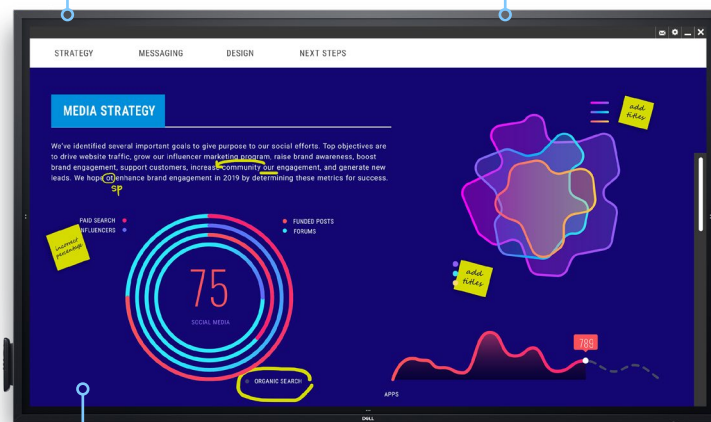

### Instant engagement

With InGlass™ 20-point touch capability, multiple users can interact with the screen at the same time.

### Write in style

Mimicking a more natural writing tool, the dual-tip stylus has an ergonomic, easy-grip design, a fine writing tip and a precise eraser. It also magnetically attaches to the side of the display, so it's never misplaced.

### Seamless integration with Dell Meeting Space Solutions

This interactive touch monitor has been tested and validated to work with complete conference room ecosystems that include high quality audio, video and room control, powered by OptiPlex Micro.

### Environmental standards

ENERGY STAR®

### Exclusive Dell Screen Drop

Improve reachability for users of different heights using Dell Screen Drop.<sup>1</sup>

### Collaboration at your fingertips

Annotate with your fingers and erase with the palm of your hand. Palm rejection allows users to rest their hands naturally onscreen without unwanted marks.

▶ [Click the image or here to play the Dell 86 4K Interactive Touch Monitor - P8624QT video.](#)

# Dell Display Manager



## Improved multitasking

Organize your screen with Easy Arrange and save profiles with Easy Arrange Memory.

## Easy navigation

Share a single keyboard, mouse and monitor between multiple PCs with USB KVM wizard.<sup>1</sup> Quickly switch between PCs with the quick-access menu or hot keys.

## Smooth deployment

Manage your fleet of monitors with features that are automatic, comprehensive and compatible with several tools.<sup>2</sup>

## Convenient customization

Quickly access your favorite features and functions with the menu launcher and hot keys.

[Download Dell Display Manager](#)

<sup>1</sup> KVM (keyboard, video, mouse) is available on select monitors only. For monitors that don't support USB KVM, the input source feature is an alternative. You can share multiple input sources to one monitor, but you cannot share one keyboard and mouse.

<sup>2</sup> Tools including SCCM/Intune and Command Line Interface scripts.



# Sustainability on Dell Monitors

## Environmental standards

This monitor uses 85% PCR (Post-consumer Recyclable) plastic in the design<sup>1</sup>, 90% recycled aluminum, and meets the latest environmental standards such as ENERGY STAR<sup>®</sup>.

## Eco-conscious packaging


Dell commercial monitors ship in select packaging components made with up to 90% recycled materials.<sup>2</sup>

## Energy conservation

Save energy when your monitor is not in use with PowerNap<sup>3</sup>, a feature that dims or puts your monitor to sleep when it's not in use.


<sup>1</sup> By weight of the total weight of plastic parts in product. Excludes printed circuit boards, labels, cables, connectors, electronic components, optical components, ESD components, EMI components adhesives, and coatings.  
<sup>2</sup> Applies to outer box and paper cushion packaging materials, based on internal analysis, October 2022.  
<sup>3</sup> Enabled by Dell Display Manager

# Recommended Accessories

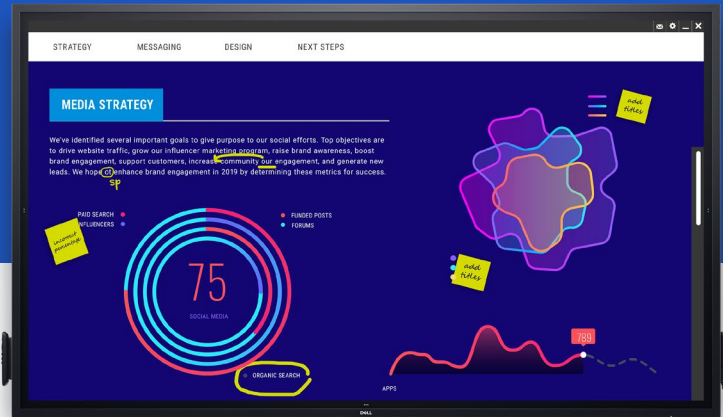

## Dell OptiPlex Micro<sup>1</sup>

Dell OptiPlex Micro enables an all-in-one like experience when combined with conferencing software. It allows video conferencing, whiteboarding, presentations and other applications to be run directly on the monitor or a very easy-to-use meeting experience.



## X-Large Fusion Micro-Adjustable Fixed Wall Display Mount – XSM1U

Chief's upgraded fixed wall mounts are based on installer feedback and direct observations of installers in the field. Many new features join Fusion favorites like Centerless shift, ControlZone leveling adjustment and ClickConnect Latching.



## Chief X-Large FUSION XPA1UB – Cart for LCD / plasma panel

This mobile FUSION AV cart incorporates rounded edges and sleek features to give the cart a softer professional feel that fits well in corporate and classroom environments.



## Chief X-Large Fusion Floor Stand – XFA1UB

This floor support solution incorporates rounded edges and sleek features to give the aesthetics a softer, professional feel, that fits well in corporate and classroom environments. The height can be adjusted by one person via a hex bit on a power drill without removing the screen.




## Logitech Rally Plus Conferencecam and Speakers

See and hear better studio-quality video, unmatched voice clarity, and RightSense automation for better meetings. The all-in-one AV system features the Rally Plus premium conferencecam with Ultra-HD optics, 15x HD zoom, modular audio with two mic pods and speakers, and RightSight auto-framing technology.

<sup>1</sup> Compatible with OptiPlex 7000 XE MFF, OptiPlex 7080 XE MFF.

# Ports & Slots

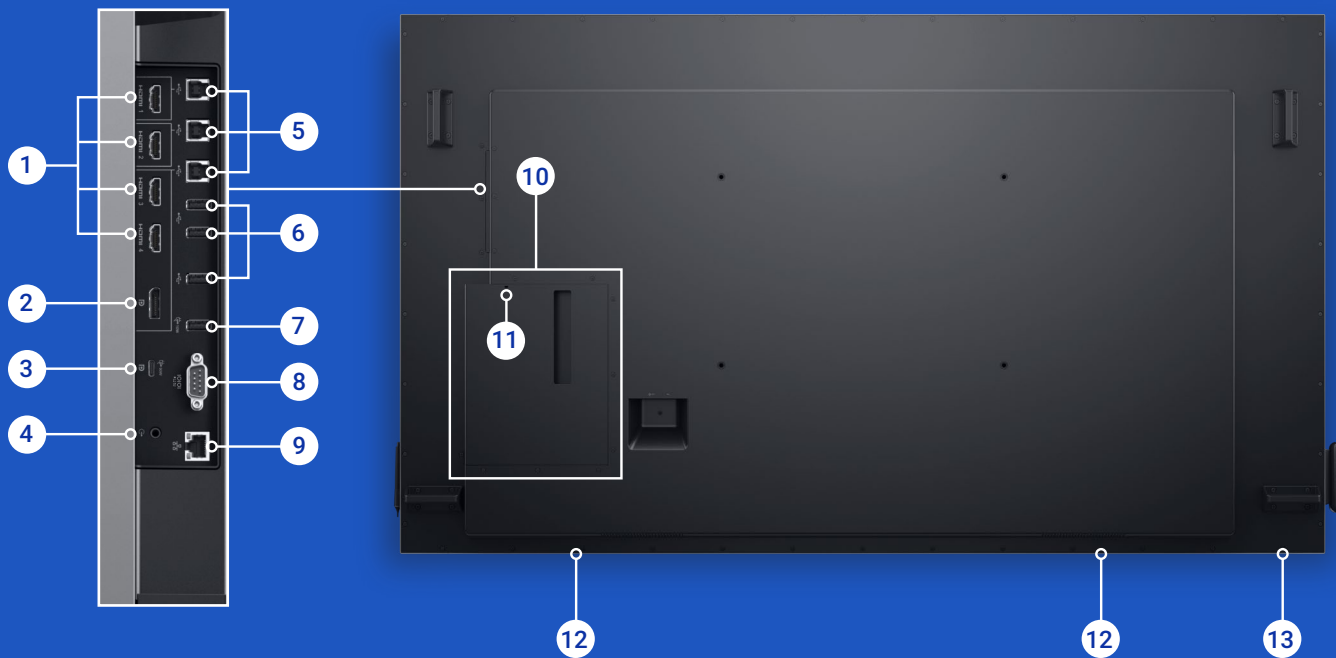

- 1** HDMI (4)
- 2** DisplayPort
- 3** USB Type-C / DisplayPort
- 4** Audio line-out<sup>1</sup>
- 5** USB 3.1 upstream (3)
- 6** USB 3.1 downstream (3)
- 7** USB charging port

- 8** RS232
- 9** RJ45
- 10** OptiPlex holder
- 11** Security lock slot
- 12** Speakers
- 13** Power on/off button

<sup>1</sup> The audio line-out port does not support headphones.

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell 86 4K Interactive Touch Monitor - P8624QT
DIAGONAL VIEWING SIZE	217.427 cm (85.60 inches)
PRESET DISPLAY AREA (H X V)	1895.04 mm x 1065.96 mm (74.60 inches x 41.97 inches)
PANEL TYPE	IPS
DISPLAY SCREEN COATING	9H, Anti-Smudge, Anti-Glare
MAXIMUM PRESET RESOLUTION	3840 x 2160 @ 60Hz
VIEWING ANGLE	178° vertical / 178° horizontal
PIXEL PITCH	0.4935 mm x 0.4935 mm
PIXEL PER INCH (PPI)	25
CONTRAST RATIO	1200 to 1 (typical)
ASPECT RATIO	16:9
BACKLIGHT TECHNOLOGY	LED
BRIGHTNESS	350 cd/m <sup>2</sup> (typical)
RESPONSE TIME	8 ms gray to gray (typical)
HDR READY	N/A
CONNECTIVITY	<ul style="list-style-type: none"> <li>• 1 x DP 1.2</li> <li>• 1 x USB Type-C</li> <li>• 4 x HDMI</li> <li>• 3 x USB 3.1 downstream port</li> <li>• 1 x USB 3.1 downstream port with BC1.2 charging capability</li> <li>• 3 x USB 3.1 upstream port</li> <li>• 1 x Analog 2.0 audio line out</li> <li>• 1 x RJ45</li> <li>• 1 x RS232</li> </ul>
ADJUSTABILITY	N/A
PBP / PIP	N/A
KEYBOARD, VIDEO AND MOUSE (KVM)	N/A
DAISY CHAIN AVAILABILITY	N/A
AUDIO OUTPUT	Yes
BUILT-IN SPEAKER	2 x 20W
DELL DISPLAY MANAGER COMPATIBILITY	Yes
SPECIFICATIONS - SERVICE / SUPPORT DETAILS	3-Year Advanced Exchange Service

FEATURE	TECHNICAL SPECIFICATION
COLOR GAMUT	72% NTSC
HEIGHT WITHOUT STAND	1156.63 mm (45.54 in.)
WIDTH WITHOUT STAND	1982.64 mm (78.06 in.)
DEPTH WITHOUT STAND	82.8 mm (3.26 in.)
WEIGHT (PANEL ONLY - FOR VESA MOUNT)	87.0 kg (191.80 lb)
WEIGHT (WITH STAND ASSEMBLY AND CABLES)	88.2 kg (194.45 lb)
WEIGHT (WITH PACKAGING)	102.0 kg (224.87 lb)
SECURITY	Security lock slot (cable lock sold separately) (based on Kensington Security Slot™)
COMPLIANT STANDARDS	<ul style="list-style-type: none"> <li>• ENERGY STAR® certified monitor</li> <li>• RoHS-compliant</li> </ul>
FLAT PANEL MOUNT INTERFACE	VESA mounting holes (600 mm x 400 mm)
TEMPERATURE RANGE	Operating: 0°C to 40°C (32°F to 104°F) Non-operating: -20°C to 60°C (-4°F to 140°F)
HUMIDITY RANGE	Operating: 10% to 80% (non-condensing) Non-Operating: 5% to 90% (non-condensing)
ALTITUDE	Operating: 5000 m (16404 ft) max Non-Operating: 12192 m (40000 ft) max
VOLTAGE REQUIRED	Input: 100-240 VAC / 50 or 60 Hz ± 3 Hz / 7.0 A (maximum) Output: 100-240 VAC / 50 or 60 Hz ± 3 Hz / 2.0 A (maximum)
POWER CONSUMPTION NORMAL OPERATION	0.3 W (Off Mode) <sup>1</sup> 0.5 W (Standby Mode) <sup>1</sup> 170.0 W (On Mode) <sup>1</sup> 430 W (Max) <sup>2</sup> 138.4 W (Pon) <sup>3</sup> Not Applicable (TEC) <sup>3</sup>
WHAT'S INCLUDED	<ul style="list-style-type: none"> <li>Monitor</li> <li>1 x OptiPlex holder</li> <li>1 x Remote control and batteries (AAAx2)</li> <li>1 x Remote control holder</li> <li>2 x Stylus</li> <li>3 x Wire saddle</li> <li>2 x Stylus nib</li> <li>1 x Power cable</li> <li>1 x Power cable for connecting OptiPlex system to display</li> <li>1 x USB Type-C cable</li> <li>1 x HDMI cable</li> <li>1 x DP Cable (DP to DP)</li> <li>1 x USB 3.1 upstream cable</li> <li>FlatFrog Board Software download instruction</li> <li>Quick start guide</li> <li>Safety, Environmental and Regulatory Information</li> </ul>

1 As defined in EU 2019/2021 and EU 2019/2013.

2 Max brightness and contrast setting with maximum power loading on all USB ports.

3 Pon: Power consumption of On Mode as defined in Energy Star 8.0. TEC: Total energy consumption in kWh as defined in Energy Star 8.0 version.



# Steadfast reliability

As the No. 1 monitor company worldwide\*, we take pride in our unyielding commitment to quality and the utmost in customer satisfaction.

## Advanced Exchange Service

This monitor comes with a 3-year Advanced Exchange Service<sup>1</sup> so that if a replacement becomes necessary, it will be shipped to you the next business day during your 3-year Limited Hardware Warranty.<sup>2</sup>

## ProSupport

Upgrade to 24x7 specialized technical phone support with the Dell ProSupport option.<sup>3</sup>



\* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q1 2023. From 2014 to 2022.

1 Advanced Exchange: Dell will send you a replacement monitor the next business day in most cases, if deemed necessary after phone/online diagnosis. Shipping times may vary by location and for monitors 55" and above. Fee charged for failure to return defective unit. See [dell.com/servicecontracts/global](https://www.dell.com/servicecontracts/global).

2 For copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see <https://www.dell.com/warranty>.

3 Availability varies, please visit [www.dell.com/support](https://www.dell.com/support) for details. In some countries, hours for in-region support may vary. Support after local business hours may be provided in a language other than the local language.

Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2023 Dell Inc. or its subsidiaries. All Rights Reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.